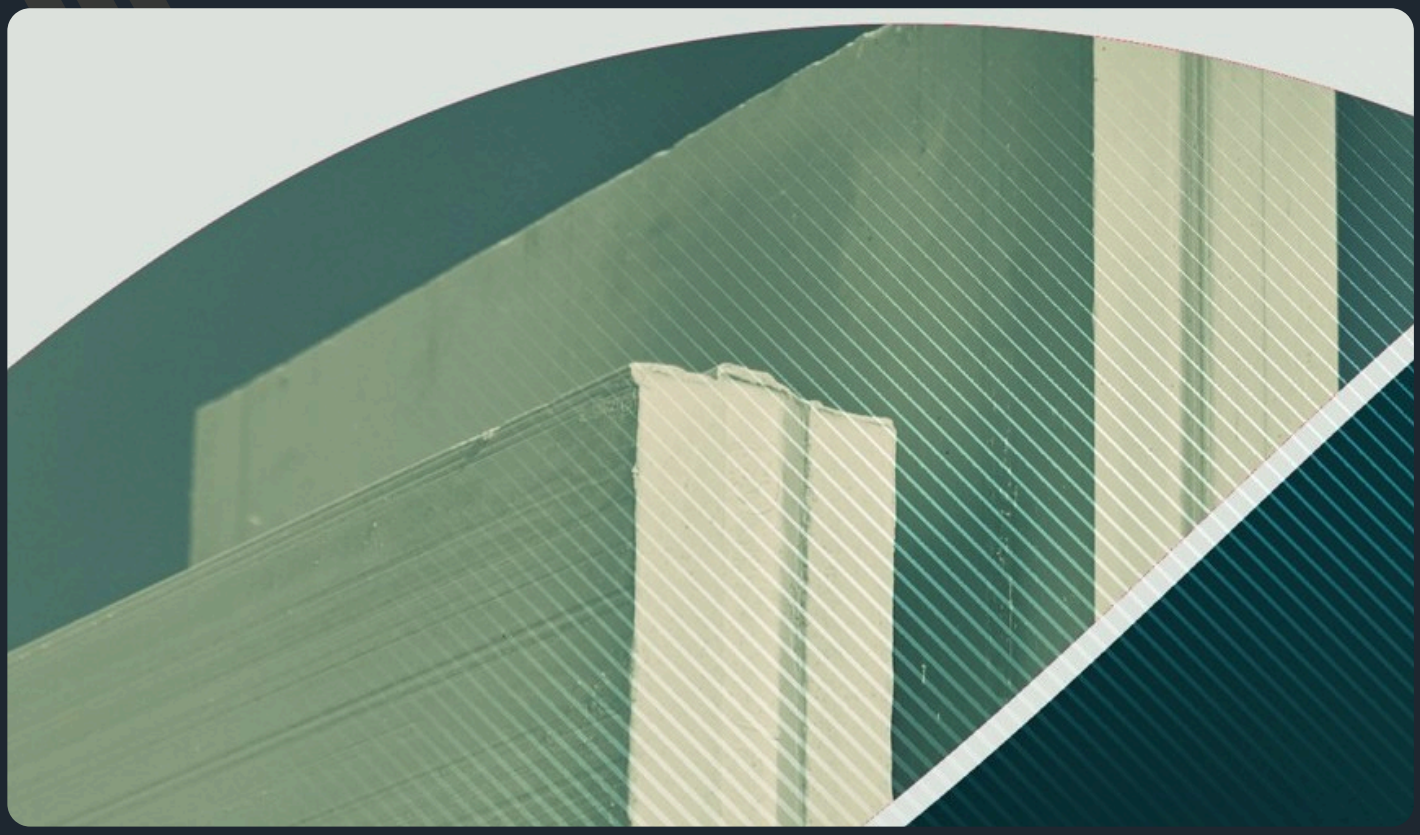


Another product in the family

G-Wall Gypsum Block

Prefabricated gypsum wall, perforated or solid; for interior partitions and dividing walls with no wet plastering

66×50×8	13.14	16.18	40
cm	kg	kg	dB
Block size	Perforated block	Solid block	Sound insulation

Prefabricated gypsum blocks have tongues and grooves that lock together on installation; the strength and stability of the wall come from a special gypsum-mortar adhesive. Easy, light installation with no specialist labour needed.

G-Wall

Advantages & specs



- Less construction waste
- Removes wet plastering and skim finishing in many cases
- Shorter build time and faster project progress
- Fire-resistant with sound insulation
- Suits interior and perimeter partitions
- Lower dead load on the structure
- Takes paint, wallpaper and wall coverings
- Cheaper than brick and clay-block partitions; easy to transport and fit

Property	Perforated block	Solid block
Block size	66×50×8 cm	66×50×8 cm
Weight per block	13.14 kg	16.18 kg
Compressive strength	60 kg/cm²	60 kg/cm²
Bending strength	30 kg/cm²	30 kg/cm²
Sound insulation	40 dB	40 dB
Thermal conductivity	0.35 kcal/h	0.35 kcal/h

Per m² of wall

Each block covers 0.33 m²; about 3 blocks per m² (not including waste).

≈ 40 kg/m² perforated

≈ 49 kg/m² solid

Note Use: interior non-load-bearing walls. Not suitable for load-bearing structures; excellent for fast partitioning in mass-housing projects.